Description:

APEX UV6090 □□□ UV □□ □□□ □□□ □□□□ □□ □□□ UV □□□□□. □□□ □□□□ UV □□□□□□ □□, □□ □□ □□□, □□ □□□, □□□ □□ □□□□ □□.

□ □□□ Epson DX5 □□□ □□ □, □□□, □, □□ □, □□□, □□, □□, □□□□, □□□□, □□ □□□ □□ □□ □□ □□□ □□□ □□ □□□ □□ □ □ □□ □□. Epson DX5 □□□ □□□ □□□□ □□ □□□ □□ □□□□□. □□□ □□ □□.

□□ □□□ □□□ □□□□ □□ □□ □□ □□□ □□□□□ UV □□□ : UV4060 / 6090 □□□ □□□□ □□□ □□□ □□ □□□□□ □ □□ □□ UV □□□, □□ □□□ uv □□□□□ □□□ uv □□□□

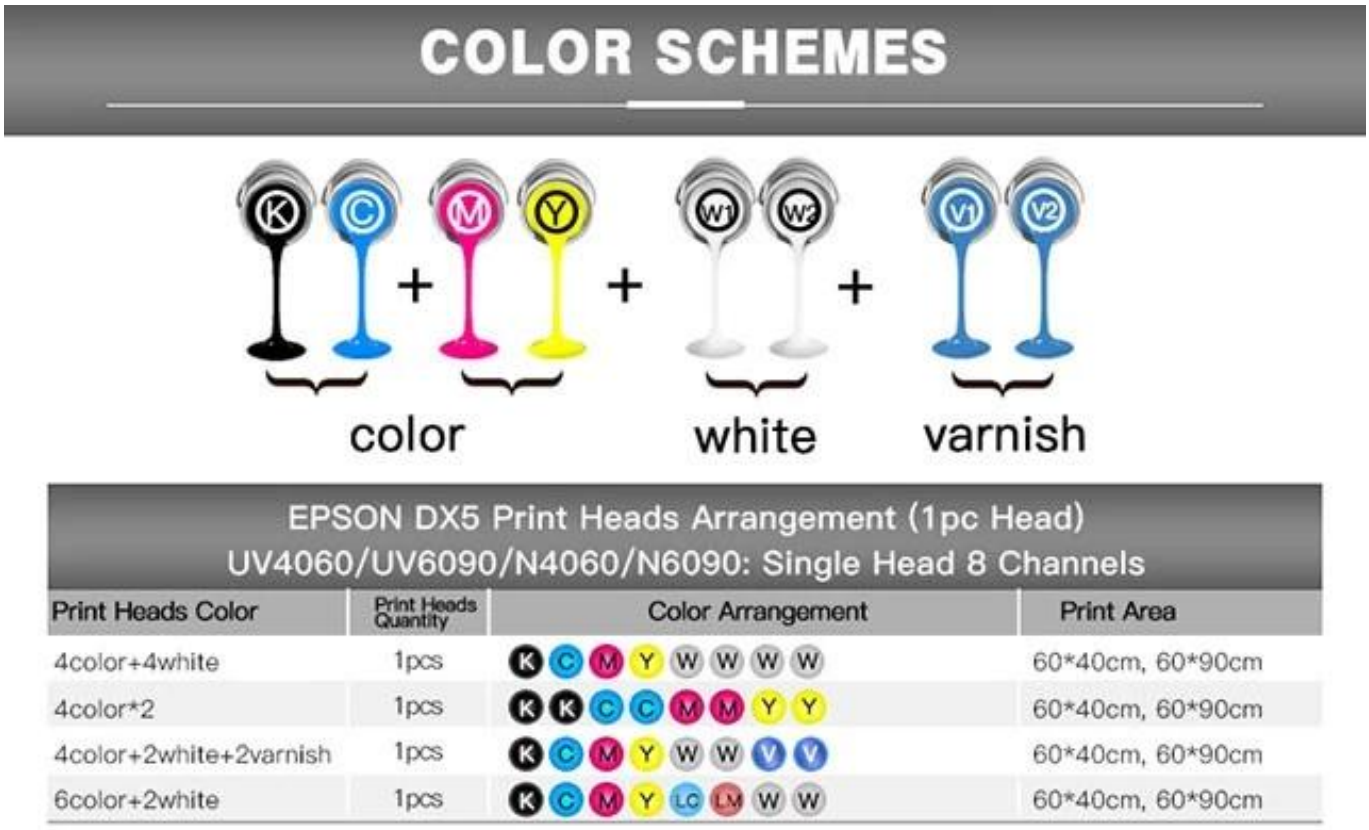

Feature:

* □□ □□□ □□ □□ □□
* □□ □□ □□ □□□ □□□
* □□□□ □□, □□□ □□ □ □□□□ □□ □□□□ □□ □□□ □□□□□.
* □□ □□ □□ : 90 * 60cm
* □□□□ □□□ □□ □ □ □□□□
* Epson DX5 (□□ 180 * 8) □□□ □□

□□**V** □□ □□□ □□ □□ □□ □□ **:** □□□□ □□□ □□ □□□ □□□ □□□□□ □□

□□ **:** PC□ □□□□ □□ □□□ □□ □ □ □□□□.

□□ □□□ **:** □□ □□ □□ □□, □□ □ □□□□□ □□ □□ □□ □ □□ □□□ □ □□□□. □□ □□ UV LED □□□□□ □□□□□ □□□□ □□□ □□ □ □ □□□ □.

□□□ □□□ □□□□□□**.** □□ □□□ □□ UV □□ □□□ □□□□□□.

□□ □□□**,** □□ □□ **:** □□ □□□ □□□ □□□ □□ Apex□ □□ □□□ □□□ □□ □□□□ □□□□□. □□ □□□□ □□□ □□ □□ □ □□□□ □□□ □□□□□ □ □ □□□□□□.

□□ □□□ **:**

1. □□□ □□□□ □□□ □□□□□□ □□ □□□□□ □□□□ □□□□ □□□ □□□□ □□□□ □□□ □□□□ □□□ □□□ □□□ □□□ □□□ □□ □□□□□.

2. □□□ □□ □□□□ □□□□ □□□□ □□□□ □□□ □□□ □□ □□□ □□ □ □□□□.

Specification:

□□	UV6090
UV □□ □□□	UV-LED □□ □□□
□□ □ □□	□□, □□□□, □□, □□, □□□, □□□, □□, □, □ □ □ □
□□ □□ □□	23.62 "* 35.43"(60 * 90cm)
□□ □□ □□	LED UV □□ (□□) / □□
□□ □□ □□	24 □□ * 41 □□ (60 * 90cm)
□□ □□ □□	14cm (5.51 □□)
□□□ □□	380W
□□□ □	50 / 60Hz 220V (± 10 %) <20A
□□	20 ~ 28 ℃ HR40-60 %
□□□ □□	Epson DX5 (□□ 180 * 8)
RIP □□□□□	SAi PhotoPrint DX
□□□□□ □□	□□ / □□□ / □□□ / □□□□□ / □□□ / □□□ / □□□□ / □□□□ / □□□□□ / □□□□□ / □□□□
□□ □□□	Windows 7 / Windows 8 / Windows 10
□□ □□	UV □□
□□ □□	KCMY + WWWW / KCMY + KCMY / KCMY + WWVV
□□ □□ □□□	□□ □□ □□ □ CISS
□□	USB3.0
□□□ □□□	285kg
□□□ □□	156 * 146 * 89 □□ □□
□□	□□ □□□ □□□ □□ □□ □□□□□ □□

Display:

Digital UV Flatbed Printer

Advantage

Well arranged
CMYK+2W ink tanks
Red light wil be on if no enough ink
Clean
Auto-clean Button
Glass platform and
vacumm table
are available
Waste ink bottle
Easy operated board
with clear instructions
Equipped with imported
beam,drag chain,Epson
DX5 printer head

❶ Direct print on almost all materiais; Wateproof,UV proof, Scartch proof;High resolution

❸ **Stirring System for White Ink**

- Effectively reduce printer head clogging
- Measurable ink amout
- Controller of ink supply
- Reduce ink Oxidating

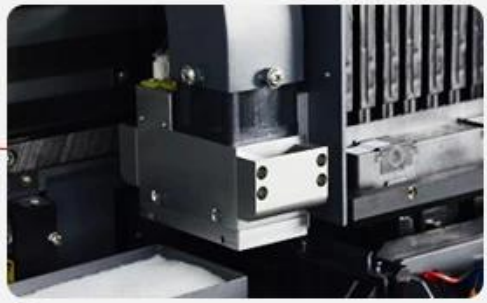

❷ Damper is the part to connect print head with ink supply and stock the ink temporarily for printer head. Damper must be kept sealed when machine is working.

4 Water Cooling System

Water's high specific heat capacity,density,and thermal conductivity, allows water to transmit heat more easily. So it can more efficiently cool down UV LED light, in order to prolong its lifetime.

5 Contoler Panel

Easy Operation, Fashionable Design

Quick cleaning: The printer head can be cleaned even it did not connect to computer.

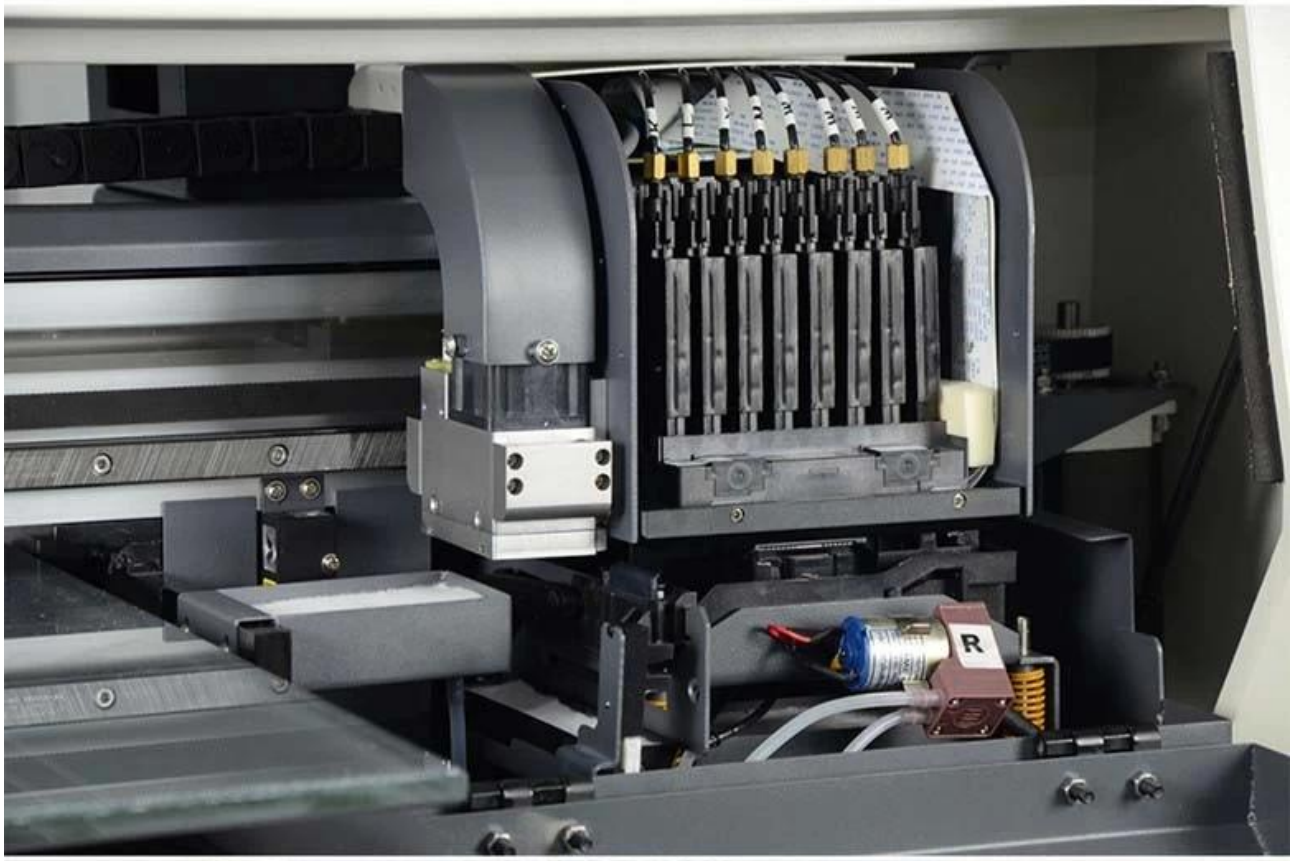

Application:

□ Apex UV6090 UV □□□□ □□ □□□ □□□□□ □□□ □□ □□ □□ □□□ □□ □□ □□□ □□ □□ □ □ □□□□.

Warranty:

Microtec / Apex□ □□ □□□ APEX UV □□□ □□□ □□□□ □□ □ □□□ □□ □□□ □□□□ □□□□. □□□ Apex□ □□□ □□ □□□ □□ □□□ □ □ □□ □□ □□□ □□□□□.

* □□ apex □□□□ □□ □□ □□ □□ □□.
* □□□ □□□ □□□ □□ □□□ 1 □ □□
* □□, □ □□ □□ □□□□ □□ 3 □□ □□
* □□□ □□□□□ □□ □□ □□□□ □□□□ □□ 5 □□ □□ □□ □□□□□ □□□□□ (□□□ □□□ □□□ □□□□, □□□ □□□□ □□□□ □□□□□)

□□ □□ □□□ □□□□>